


LEVEL DETECTOR



- ▶ Apply with CU-1/2.
- ▶ Stops the conveyor when level in receiving vessel is reached.

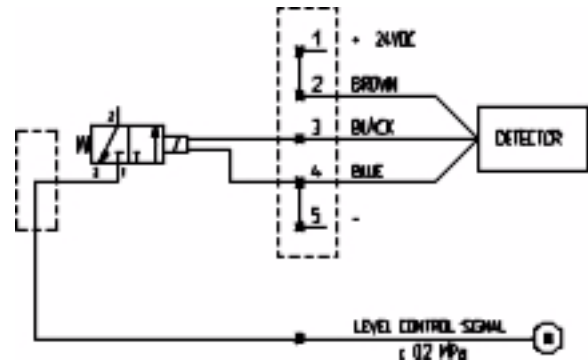

TECHNICAL DATA

Description	Unit	Value
Material		PC, POM
Temperature range	°C	0-50
Weight	g	622
Voltage	V	24
Safety classification, box		IP54

TECHNICAL DATA, CAPACITIVE GAUGE

Description	Unit	Value
Temperature, operating	°C	-30-70
Cable, capacitive gauge	mm ²	3x0.5
Safety classification, capacitive gauge		IP67
Current, max	mA	300
Switching power	W	7.2

ORDERING INFORMATION

Description	Art. No.
Level detector	0100267

