

Feed adapter D=32, piFLOW® i/f, 020288g




- To suit Piab feed station or transition pieces for piFLOW® i/f.
- Pickled $\leq$ Ra 0.8 in product contact zone.

Общее

Материал	CuNi, ASTM 304
Temperature	0 – 60 °C
Weight	1,83 kg

Масштабные чертежи

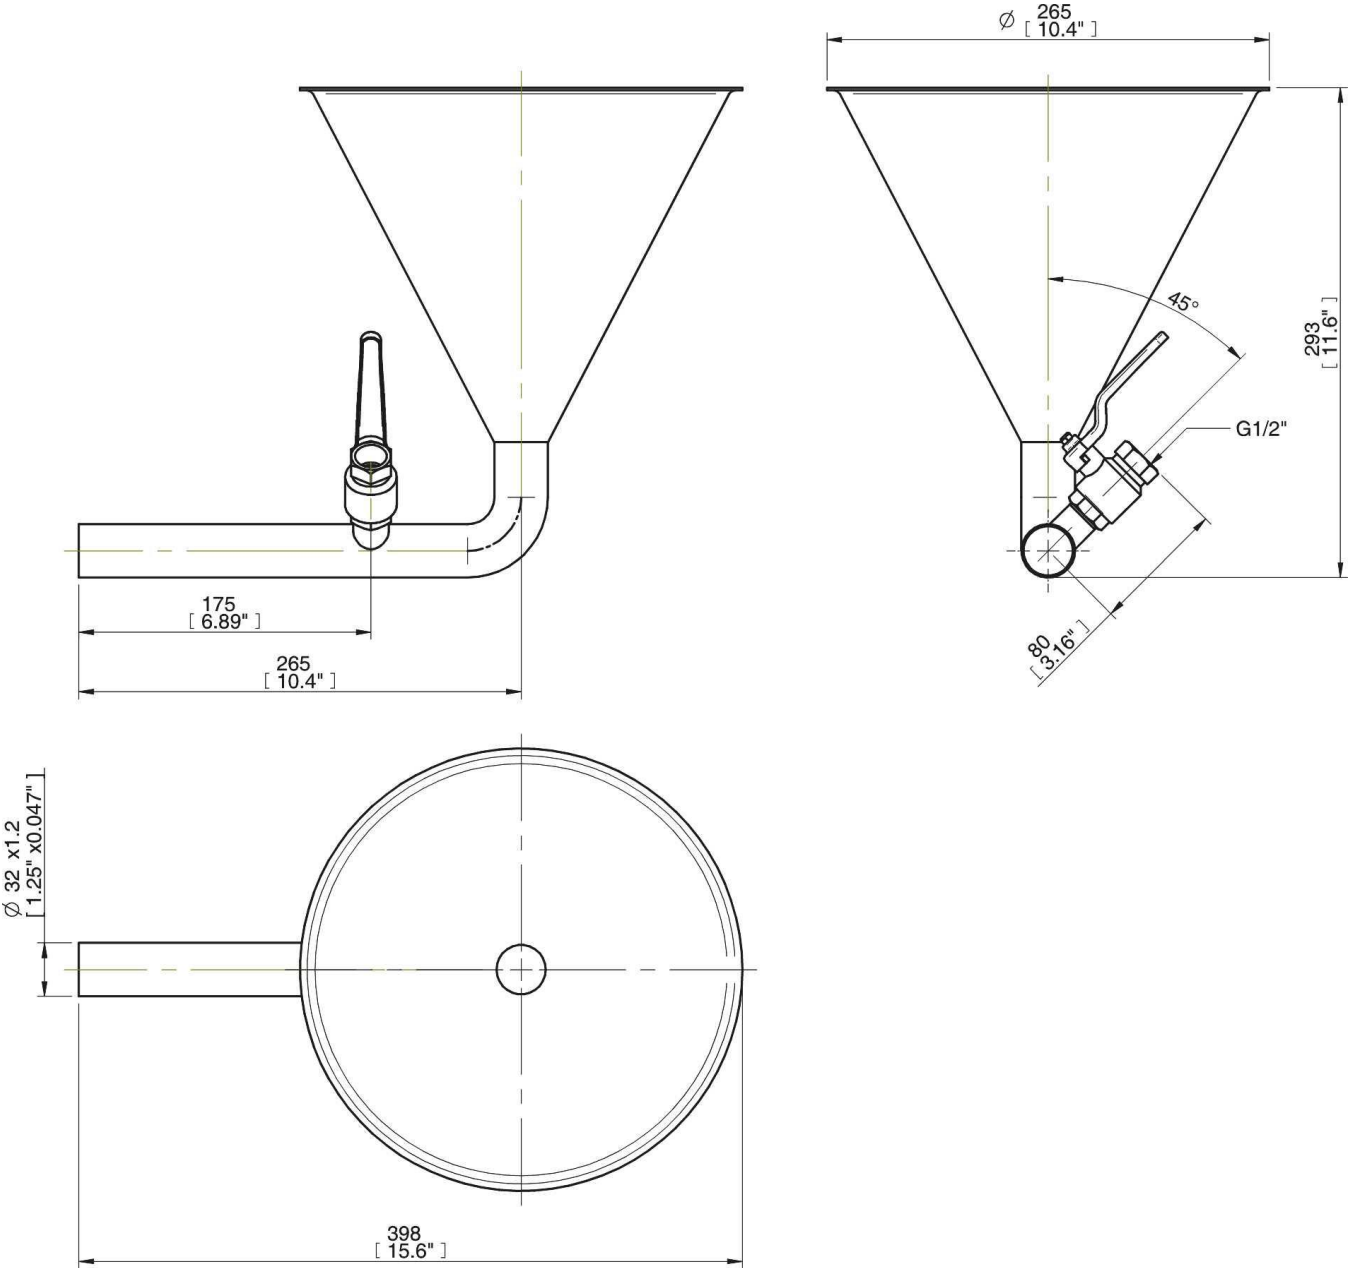

Аксессуары

	Номер изделия
Clamp ring 250 cpl, piFLOW®i	0126331
Clamp ring 250 cpl SS, piFLOW®f	0128990
U-shape seal ID=250 t=2mm, piFLOW®i	0125967
U-shape seal ID=250 t=2mm, piFLOW®f	0128998