

Suction pipe 63 with ball valve, 0202347



- For picking up powders and granules from barrels, hoppers and bags.
- The amount of carrying air can be adjusted via the ball valve, to allow for optimum air to product ratio.
- The inlet of the suction pipe is equipped with an arched steel wire to prevent bags from being drawn in to the pipe.
- The suction pipe diameter range matches the conveyor inlet and piping size range.


Общее

| | |
|---------------------|--|
| Отделка поверхности | Pickled, general product contact surfaces: $Ra \leq 0,8$ |
| Материал | CuNi, ASTM 304 |
| Weight | 3,12 kg |

Измерение

| | |
|---------|------------------|
| Диаметр | 63,5x1,65 mm (D) |
| Высота | 231 mm (H) |
| Длина | 1050 mm (L1) |
| Длина 2 | 125 mm (L2) |
| Резьба | 1 in (G) |

Масштабные чертежи

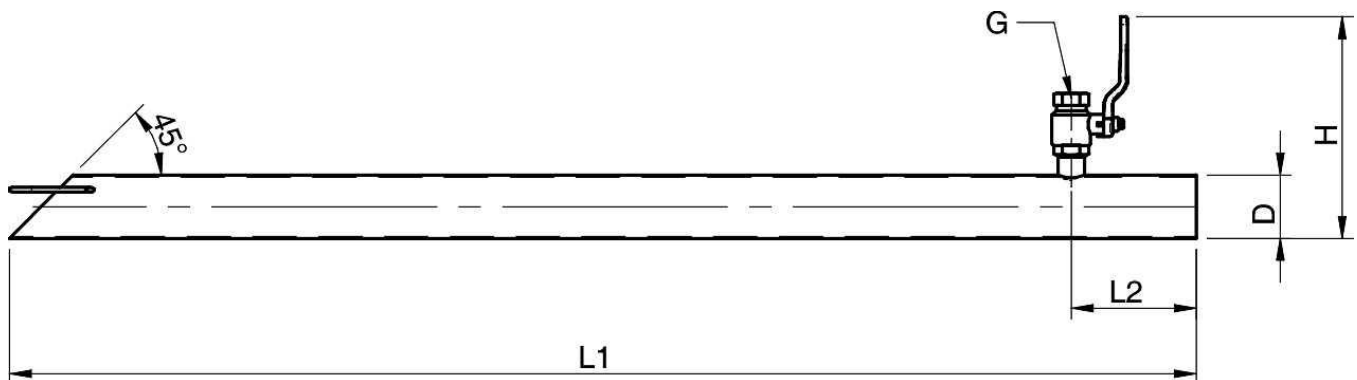

Аксессуары

| | Номер изделия |
|-----------------------------|---------------|
| Vacuum filter G3/8" (10 µm) | 3116671 |
| Vacuum filter G1/2" (10 µm) | 3116651 |
| Vacuum filter G1" (10 µm) | 3116672 |
| Hose clamp D=68-85 | 3113696 |
| Hose clear 2.50 in per foot | CPVH2.50 |
| Hose clear PVC 63 per metre | 0207847 |