


# Suction cup F50-2 HNBR, 1/8" NPSF female

, F50-2.37.05AA



- Suitable for flat objects.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel.

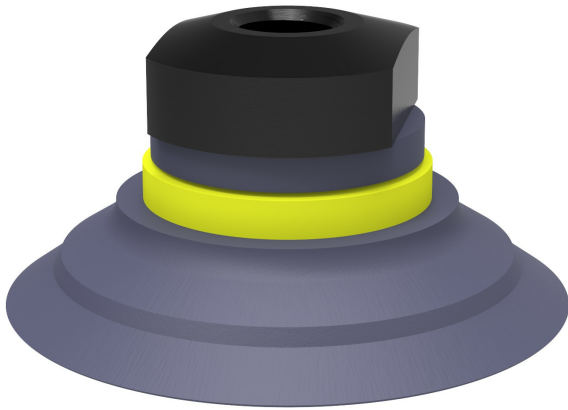

## General

Curve radius	2.17 in
Movement, vertical max.	0.09 in
Application	Glass handling, High/low temp cup (plastic), Mark Free, Plastic injection molded parts, Dry sheet metal
Material	HNBR
Suction cup model	F
Suction cup shape	Flat
Volume	0.61 in <sup>3</sup>
Weight	0.49 oz

## Fitting

Fitting size	1/8"
Fitting style	Female
Fitting type	NPSF-thread
Fitting option	None

## Dimension

Height	1.04 in
Outer diameter	2.09 in
Outer diameter, actuated	2.15 in

## Performance — lifting forces

		
6 -inHg	8.09 lbf	5.4 lbf
18 -inHg	16.6 lbf	8.99 lbf
27 -inHg	21.6 lbf	11.2 lbf


## Material

	HNBR 75° Shore A
Color	Blue/grey
Hardness	75 °Shore A
Temperature	-22 – 284 °F

## Material resistance

	HNBR 75° Shore A
Alcohol	++
Concentrated acids	+
Ethanol	N/A
Hydrolysis	++
Methanol	N/A
Oil	+++
Oxidation	+++
Gasoline	+++
Wear resistance	+++
Weather and ozone	+++

## Dimensional drawings



## Spare parts

	Part no.
Suction cup F50-2 HNBR	F50-2.37
Fitting 1/8" NPSF female, 50	05AA

## Accessories

	Part no.
Suction cup F50-2 Silicone	F50-2.20
Suction cup F50-2 Nitrile-PVC	F50-2.30
Suction cup F50-2 Nitrile-PVC	31.50.241P
Suction cup F50-2 Silicone, for fitting with cone valve	31.50.241S
Fitting G3/8" male, 50, with mesh filter and dual flow control valve	05DD
Fitting G3/8" male, 50, with mesh filter	05AD
Fitting G1/4" male, with dual flow control valve	05DB
Fitting G1/4" male, 50, with mesh filter	05AB
Fitting 5x1/8" NPSF female, 50, with dual flow control valve	05DF
Fitting 5x1/8" NPSF female, 50	05AF
Fitting 3/8" NPT male, with mesh filter	05AE
Fitting 3/8" NPT male, with dual flow control valve	05DE
Fitting 1/8" NPSF female, 50, with mesh filter	05AG
Fitting 1/8" NPSF female, 50, with dual flow control valve	05DA
Fitting 1/8" NPSF female, 50, with cone valve	05UV
Fitting 1/8" NPSF female, 50, PA	05CA
Fitting 1/4" NPT male, with mesh filter	05AC
Fitting 1/4" NPT male, with dual flow control valve	05DC