


# Safe solution for sheet handling



No need to compromise


[www.piab.com](http://www.piab.com)

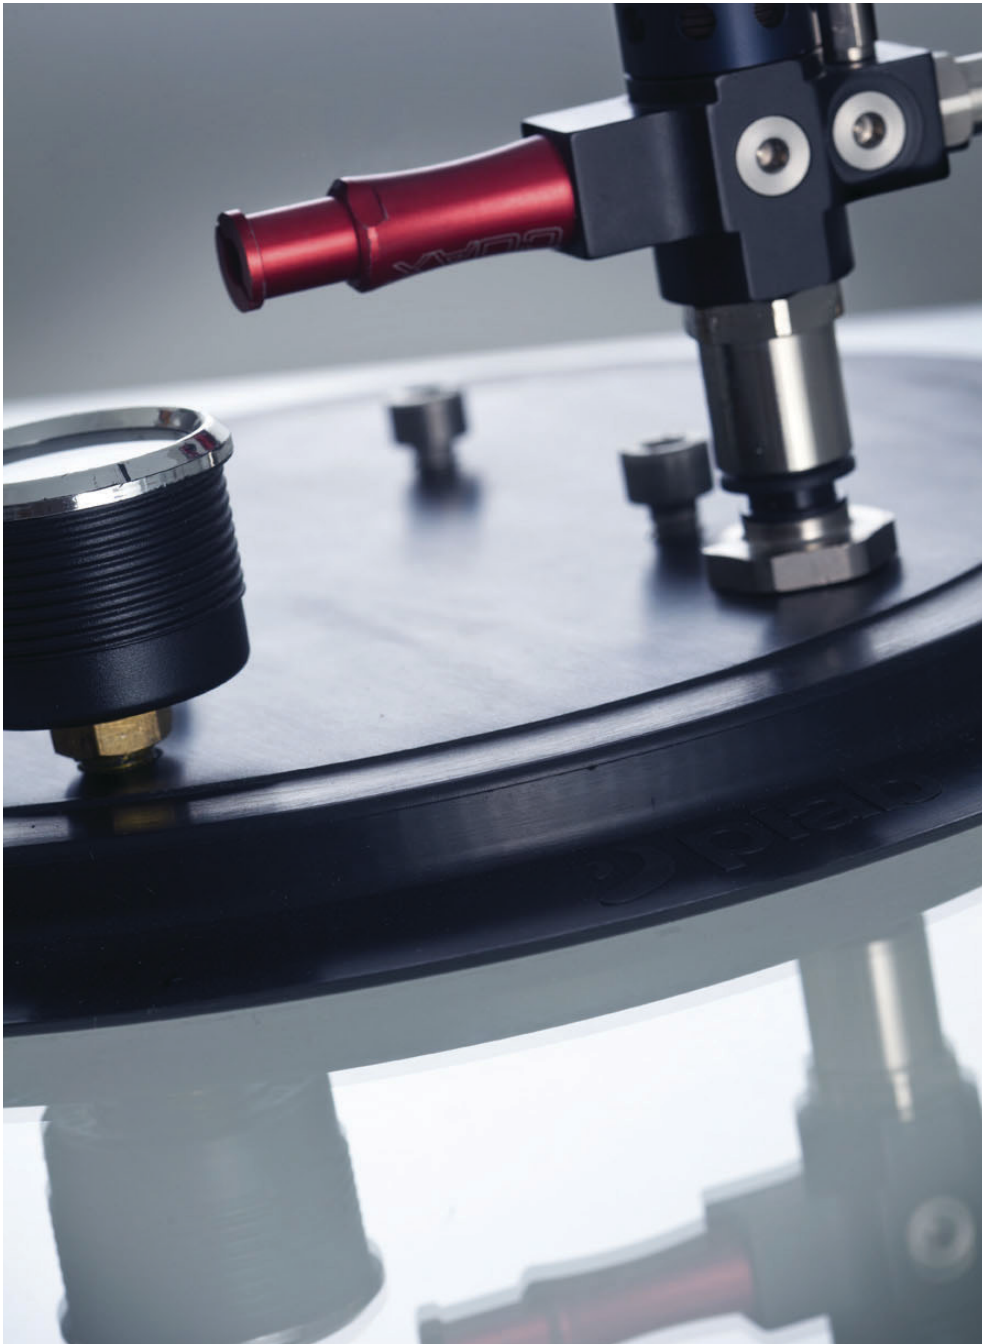

# Extra large suction cups with optimum flexibility

Flat mounting plate facilitates customized threaded interface

Standard interface for bar mounting, extra accessory port for quick part release and vacuum sensing

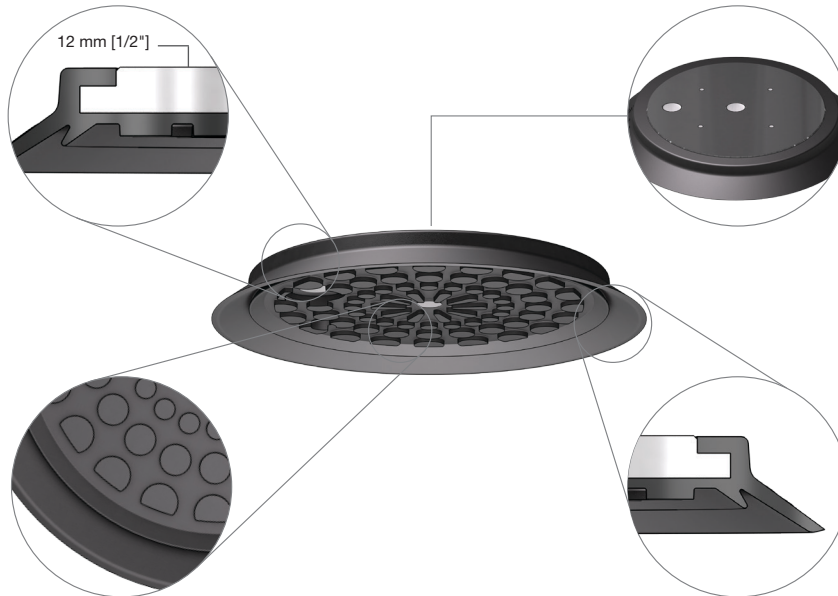

Special friction pattern withstands high shear forces during vertical handling

Outer and Inner lip – increases safety in case of tear or overload

Technical table

| Description | Outer Diameter* (mm) | Lifting force**, N at -90kPa |          | Mounting interface (mm) | Weight (g) | Temperature range (°C) | Article number |
|-------------|----------------------|------------------------------|----------|-------------------------|------------|------------------------|----------------|
|             |                      | Vertical                     | Parallel |                         |            |                        |                |
| XLF 150     | Ø 153                | 780 / 1130                   | 663      | G1/2, center            | 362        | 0-90                   | 0127131        |
| XLF 200     | Ø 204                | 1720 / 2200                  | 1462     | 4x M6, 70x70            | 792        | 0-90                   | 0127132        |
| XLF 250     | Ø 250                | 2870 / 3540                  | 2440     | 4x M6, 70x70            | 1280       | 0-90                   | 0127133        |
| XLF 300     | Ø 304                | 4630 / 5450                  | 3936     | 4x M8, 82x82            | 2035       | 0-90                   | 0127134        |

\* All cups are 27 mm in height

\*\* Inner / Outer lip

The hardness is 60° Shore A and the connection is a standard G 1/2" female

**No need to compromise**

[www.piab.com](http://www.piab.com)

