# **piab** Evolving automation



Item no: 0101787

## Suction cup F50MF Thermoelastic polyurethane, 1/4" NPT male, with mesh filter

Suction cup of TPU, a mark-free material that leaves no trace on the object being handled. Suitable for flat surfaces. The cleats stop deformation by preventing suction of the object into the cup. The suction cup has good stability and very little movement. Also suitable when the lifting force is parallel to the surface as th... cleats increase friction.

- Suction cup of TPU, a mark free material that leaves no trace on the object being handled.
- Suitable for flat surfaces.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.

#### General

Application	Mark Free
Suction cup shape	Flat
Material	Thermoplastic Polyurethane (TPE-U)
Suction cup model	F-MF
Weight	10 g
Volume	10 cm <sup>3</sup>
Suction cup model	F50MF
Movement, vertical max.	2.2 mm
Curve radius, min.	95 mm


#### Fitting

Fitting option	Filter mesh
Fitting size	1/4"
Fitting style	Male
Fitting type	NPT-thread

Dimension

Dimension			
Height	32.5 mm		
Outer diameter	53 mm		
Performance - lifting forces			
F50MF	Â	→ △	
20 -kPa	24.5 N	31 N	
60 -kPa	92 N	82 N	
90 -kPa	141 N	107 N	
Material			
Name	TPU		
Colour	WhiteTransparent		
Temperature	-20 - 80 °C		
Hardness	81 °Shore A		
	TPU		
Alcohol	++		
Concentrated acids	-		
Ethanol	n/a		
Hydrolysis	-		
Methanol	n/a		
Oil	+++		
Oxidation	++		
Petrol	-		
Wear resistance	+++		
Weather and ozone	+++		

Dimensional drawings 🔓

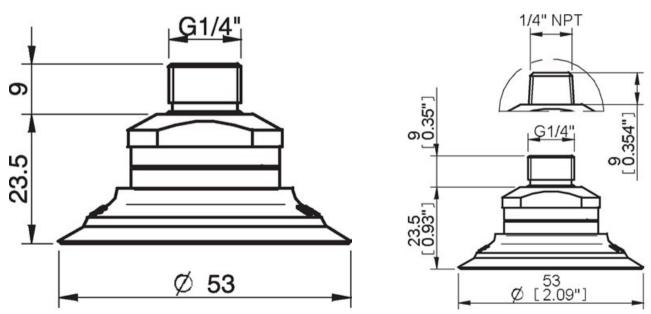

Values specified in the data sheet are tested at:

- Room temperature: (20°C [68°F] ± 3°C [5.5°F])
- Standard atmosphere: (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg])
- Relative humidity: 0-100%
- Compressed air quality: DIN ISO 8573-1 class 4

#### Accessories

3251015 Fitting G3/8" male, 50, with mesh filter and dual flow control value
3250087 Fitting G3/8" male, 50, with mesh filter
$3251013  \Big   {\rm Fitting}   {\rm G1/4"}  {\rm male},$ with mesh filter and dual flow control valve
3250092 Fitting G1/4" male, 50, with mesh filter
3251017 Fitting 5x1/8" NPSF female, 50, with dual flow control value
0100262 Fitting 5x1/8" NPSF female, 50
3250090 Fitting 3/8" NPT male, with mesh filter
3251016 Fitting 3/8" NPT male, with dual flow control value
0101154 Fitting 1/8" NPSF female, 50, with mesh filter
3251012 Fitting 1/8" NPSF female, 50, with dual flow control valve
3150198   Fitting 1/8" NPSF female, 50, PA
3250017   Fitting 1/8" NPSF female, 50

### Spare parts

0101143 Suction cup F50MF Thermoelastic polyurethane

3251014 Fitting 1/4" NPT male, with dual flow control valve

3250094 Fitting 1/4" NPT male, with mesh filter